

### SPLIT CLAMPS

- Standard finish galvanised (EG)
- Rubber insert
- Pull strength 600kg
- Twist strength 8kg

**Material/Finish:**  
Mild Steel Zinc-Electroplated (EG)

**Pipe Clamp Sizes:**  
Diameter range stated is the suitable pipe O.D range

**Safe Working Load (tensile) :**  
200 kg


**Sound Reduction:**  
18 dB (A)

**Working Temperature Range:**  
-40°C / +110°C

**Fire resistance:**  
Class B2 (DIN 4102)


Rubber : EPDM Rubber  
(Ethylene Propylene Diene Monomer (M-class) rubber)  
Thickness : 4 -5mm

REF Diameter	T (mm)	A (mm)	B (mm)	C (mm)	C (mm)
SC/12-16 ZP R/L	2.0	20.0	M6 x 20mm	M8 / M10	<b>32.40</b>
SC/15-19 ZP R/L	2.0	20.0	M6 x 20mm	M8 / M10	<b>32.60</b>
SC/20-25 ZP R/L	2.0	20.0	M6 x 20mm	M8 / M10	<b>34.10</b>
SC/26-30 ZP R/L	2.0	20.0	M6 x 20mm	M8 / M10	<b>37.00</b>
SC/32-36 ZP R/L	2.0	20.0	M6 x 20mm	M8 / M10	<b>38.70</b>
SC/38-43 ZP R/L	2.0	20.0	M6 x 20mm	M8 / M10	<b>40.50</b>
SC/47-51 ZP R/L	2.0	20.0	M6 x 20mm	M8 / M10	<b>44.50</b>
SC/53-58 ZP R/L	2.0	20.0	M6 x 20mm	M8 / M10	<b>51.70</b>
SC/60-64 ZP R/L	2.0	20.0	M6 x 20mm	M8 / M10	<b>52.70</b>
SC/68-72 ZP R/L	2.0	20.0	M6 x 20mm	M8 / M10	<b>57.00</b>
SC/75-80 ZP R/L	2.0	20.0	M6 x 20mm	M8 / M10	<b>60.40</b>
SC/81-86 ZP R/L	2.0	20.0	M6 x 20mm	M8 / M10	<b>61.40</b>
SC/87-92 ZP R/L	2.5	20.0	M6 x 20mm	M8 / M10	<b>68.20</b>
SC/99-105 ZP R/L	2.5	20.0	M6 x 20mm	M8 / M10	<b>68.40</b>
SC/107-112 ZP R/L	2.5	20.0	M6 x 20mm	M8 / M10	<b>78.80</b>
SC/113-118 ZP R/L	2.5	20.0	M6 x 20mm	M8 / M10	<b>81.50</b>
SC/125-130 ZP R/L	2.5	20.0	M6 x 25mm	M8 / M10	<b>88.60</b>
SC/132-137 ZP R/L	2.5	20.0	M6 x 25mm	M8 / M10	<b>98.30</b>
SC/138-142 ZP R/L	2.5	20.0	M6 x 25mm	M8 / M10	<b>107.50</b>
SC/148-152 ZP R/L	2.5	20.0	M6 x 25mm	M8 / M10	<b>114.10</b>
SC/159-166 ZP R/L	2.5	20.0	M6 x 25mm	M8 / M10	<b>125.20</b>
SC/200-212 ZP R/L	2.5	20.0	M6 x 25mm	M8 / M10	<b>137.60</b>
SC/215-220 ZP R/L	2.5	20.0	M6 x 25mm	M8 / M10	<b>153.00</b>
SC/249-254 ZP R/L	2.5	20.0	M6 x 25mm	M8 / M10	<b>172.40</b>
SC/314-319 ZP R/L	2.5	20.0	M6 x 25mm	M8 / M10	<b>195.80</b>

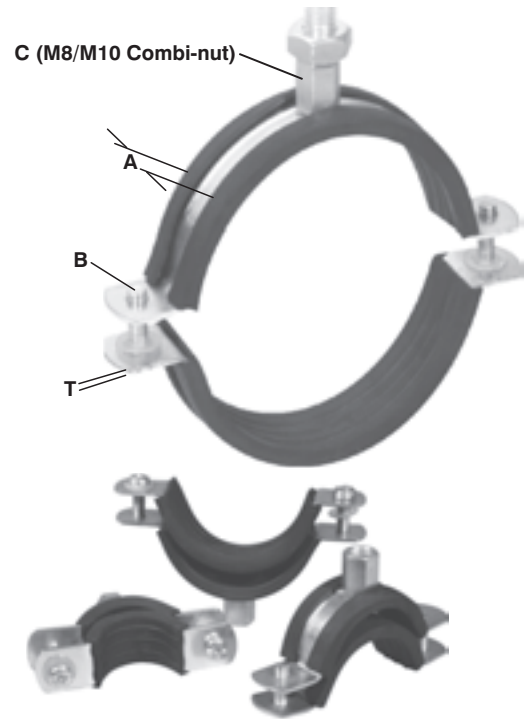

### Traditional 2/Piece Clamps

- Standard Finish: Galvanised (PG)
- Fasteners (EG) Supplied separately
- Design Load Safety Factor of 5

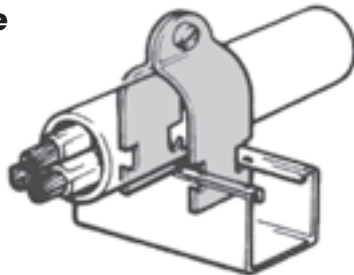

Part No.	Overall Ø	Fasteners Required	Design Load	Material Thickness	Price
P2025	8,5-10,0	M6 x 20mm Gutter Bolt & Nut Required	180 kg	1,5mm	<b>14.90</b>
P1108	10,5-12,5		180 kg	1,5mm	<b>14.90</b>
P2026	11,5-13,5		180 kg	1,5mm	<b>14.90</b>
P1108-A	10,5-14,0		180 kg	1,5mm	<b>14.90</b>
P2027	14,5-16,5		180 kg	1,5mm	<b>14.90</b>
P1109	16,0-18,5		180 kg	1,5mm	<b>14.90</b>
P2028	17,0-19,5		180 kg	1,5mm	<b>14.90</b>
P1111	21,0-25,5	180 kg	1,5mm	<b>14.90</b>	
P2030	25,5-28,0	180 kg	2,0mm	<b>19.70</b>	
P1112	27,0-30,0	270 kg	2,0mm	<b>20.10</b>	
P2032	30,0-33,5	270 kg	2,0mm	<b>21.30</b>	
P1113	32,0-36,0	270 kg	2,0mm	<b>21.80</b>	
P2034	35,0-40,0	270 kg	2,0mm	<b>23.30</b>	
P1114	38,0-44,0	270 kg	2,0mm	<b>24.60</b>	
P1115	45,0-51,0	360 kg	2,5mm	<b>35.00</b>	
P2038	49,0-52,0	360 kg	2,5mm	<b>36.00</b>	
P2039	51,0-56,0	360 kg	2,5mm	<b>37.50</b>	
P1117	54,0-70,0	360 kg	2,5mm	<b>39.60</b>	
P2043	62,0-75,0	360 kg	2,5mm	<b>42.90</b>	
P1118	71,0-85,0	360 kg	2,5mm	<b>45.50</b>	
P1119	87,0-95,0	360 kg	2,5mm	<b>47.00</b>	
P1120	99-110	360 kg	2,5mm	<b>56.40</b>	
P1121	110-122	360 kg	2,5mm	<b>61.70</b>	
P1122	116-140	360 kg	2,5mm	<b>65.80</b>	
P1123	135-145	360 kg	2,5mm	<b>68.20</b>	
P1124	141-175	360 kg	3,0mm	<b>89.40</b>	
P1125	160-200	360 kg	3,0mm	<b>99.00</b>	
P1126	196-230	360 kg	3,0mm	<b>108.50</b>	
P1127	225-270	360 kg	3,0mm	<b>120.70</b>	
P1129	245-280	360 kg	3,0mm	<b>128.60</b>	

### TP 2/Piece Clamps

- Supplied as one piece including fastener
- Designed for use with Cab-Strut channel
- Practical range of eleven convenient sizes
- Body and screw galvanised (EG)
- Design load 200kg (safety factor of 5)
- Suitable for pipework and cables

Part Number	Overall Diameter mm	Bolt Size mm	Material Thickness mm	Price
TP15/20	15-20	M6 x 20	1,6	<b>16.20</b>
TP20/25	20-25	M6 x 20	1,6	<b>19.70</b>
TP25/30	25-30	M6 x 20	1,6	<b>20.70</b>
TP30/40	30-40	M6 x 20	2,0	<b>28.50</b>
TP40/50	40-50	M8 x 20	2,0	<b>31.40</b>
TP50/60	50-60	M8 x 20	2,0	<b>37.40</b>
TP60/70	60-70	M8 x 20	2,0	<b>40.60</b>
TP70/80	70-80	M8 x 20	2,5	<b>51.30</b>
TP80/90	80-90	M8 x 20	2,5	<b>56.10</b>
TP90/100	90-100	M8 x 30	2,5	<b>58.80</b>
TP100/110	100-110	M8 x 30	2,5	<b>63.00</b>
TP110/120	110-120	M8 x 30	2,5	<b>67.00</b>
TP120/130	120-130	M8 x 30	2,5	<b>70.40</b>



### Strap Clamps

- Supplied with strap, studs, nuts, washers and collets
- Designed for use with Cab-Strut channel
- Practical range of four convenient straps which are fully adjustable and offer a very flexible range of sizes
- Strap, studs, nuts, washers and collets galvanised (EG)
- Suitable for large diameter poles and pipes

Part Number	Diameter	Strap Length	Thread Size	Stud Length	Price
i0004226	75-100mm	160mm	M10	85mm	<b>100.40</b>
i0004227	100-125mm	200mm	M10	95mm	<b>103.50</b>
i0004228	125-150mm	230mm	M10	115mm	<b>109.80</b>
i0004229	150-175mm	295mm	M10	120mm	<b>116.00</b>
i0004230	175-200mm	325mm	M10	135mm	<b>122.10</b>



# PIPE & CABLE CLAMPS

## CABSTRUT®

### "Q" CLAMPS- SG GALVANISED

Clamp Size	Bolt Size	Price	Clamp Size	Bolt Size	Price
Q16mm	M6	<b>25.90</b>	Q52mm	M8	<b>53.90</b>
Q20mm	M6	<b>28.30</b>	Q58mm	M8	<b>59.10</b>
Q26mm	M6	<b>29.40</b>	Q66mm	M8	<b>63.30</b>
Q32mm	M6	<b>34.70</b>	Q70mm	M8	<b>67.70</b>
Q40mm	M8	<b>47.40</b>	Q78mm	M8	<b>71.90</b>
Q46mm	M8	<b>48.40</b>			


### "Q" CLAMPS- SS304 S/Steel

Clamp Size	Bolt Size	Price	Clamp Size	Bolt Size	Price
Q16mm	M6	<b>65.80</b>	Q52mm	M8	<b>142.90</b>
Q20mm	M6	<b>71.90</b>	Q58mm	M8	<b>157.20</b>
Q26mm	M6	<b>74.80</b>	Q66mm	M8	<b>168.00</b>
Q32mm	M6	<b>90.80</b>	Q70mm	M8	<b>179.40</b>
Q40mm	M8	<b>120.40</b>	Q78mm	M8	<b>190.80</b>
Q46mm	M8	<b>128.20</b>			

### P75 HANGER CLAMPS

Part Number	NOM. BORE	A Ø (mm)	B (mm)	C (mm)	D (mm)	E (mm)	Price
P75/15	15	21	52	25	1,6	M8	<b>15.00</b>
P75/20	20	27	57	25	1,6	M8	<b>15.90</b>
P75/25	25	34	68	25	1,6	M8	<b>16.20</b>
P75/32	32	42	75	25	1,6	M8	<b>19.50</b>
P75/40	40	48	87	25	1,6	M8	<b>20.40</b>
P75/50	50	60	110	25	1,6	M8	<b>23.60</b>
P75/65	65	76	118	25	2,0	M10	<b>39.00</b>
P75/80	80	89	129	25	2,0	M10	<b>43.30</b>
P75/100	100	114	152	25	2,0	M10	<b>63.80</b>
P75/125	125	140	194	25	2,5	M10	<b>152.70</b>
P75/150	150	166	228	25	3,0	M10	<b>178.80</b>
P75/200	200	219	295	30	3,5	M12	<b>200.80</b>

Light & strong  
Body galvanised (SG)  
Screw galvanised (SG)  
One common clamp for all applications




Cable Ladder Cross Rung Angle Iron



CAB-STRUT Channel Wire Mesh Tray

Light & strong  
Body SS304 S/Steel  
Screw SS304 S/Steel  
One common clamp for all applications

- Standard finish galvanised (PG)
- Fasteners (EG)
- Suitable for hanging plumbing, drainage and sprinkler pipes





### SADDLE CLAMPS

Part No.	Nom. Bore	A Ø (mm)	Bolt (mm)	Price
SS1	15	21	M6	<b>8.90</b>
SS1/1	20	26	M6	<b>9.90</b>
SS1/2	25	34	M6	<b>12.80</b>
SS1/3	32	42	M6	<b>14.30</b>
SS1/4	40	48	M6	<b>16.00</b>
SS1/5	50	60	M6	<b>17.10</b>
SS1/6	65	76	M6	<b>20.60</b>

Part No.	Nom. Bore	A Ø (mm)	Bolt (mm)	Price
SS1/7	80	88	M8	<b>24.60</b>
SS1/8	100	101	M8	<b>27.00</b>
SS1/9	125	114	M8	<b>36.60</b>
SS1/10	150	142	M8	<b>58.40</b>
SS1/11	-	173	M8	<b>69.10</b>
SS1/12	200	225	M8	<b>86.70</b>


Standard finish galvanised (PG)  
Fasteners not included

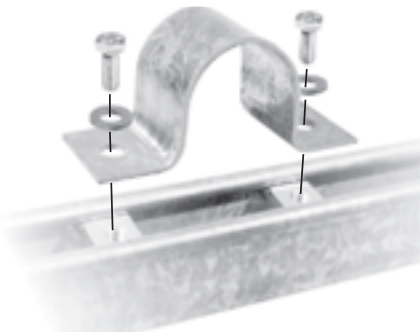

### ALUMINIUM TREFOIL CLAMPS

Part No.	Cable Size A (mm)	Mat. (mm)	Bolt (mm)	Plate Length (mm)	Price
TR-30	30	4,5	M6	120	<b>177.20</b>
TR-37	37	4,5	M6	149	<b>193.60</b>
TR-42	42	4,5	M6	174	<b>225.00</b>
TR-48	48	4,5	M6	174	<b>238.10</b>
TR-53	53	4,5	M6	199	<b>253.50</b>
TR-57	57	4,5	M6	199	<b>257.90</b>
TR-63	63	4,5	M6	224	<b>262.60</b>

- No magnetic circuit can be created in aluminium
- Trefoil clamps can withstand a rupturing capacity of 95kA at 750mm spacings

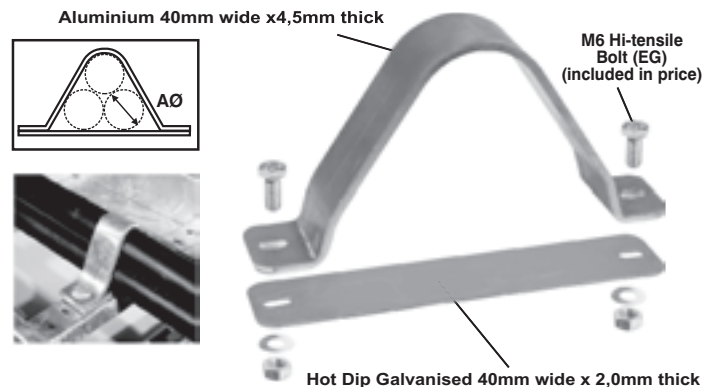

### CABLE DIAMETER/MASS

Approximate calculated dimension and nett mass per 100 metres				Gland to suit
Rated area mm <sup>2</sup>	Number of cores	Max. overall dia. mm	Nett mass kg/100m	
1,5	2	13,7	33	0
	3	14,2	37	0
	4	15,1	41	0
	7	17,6	55	1
	12	22,9	89	2
2,5	2	14,5	39	0
	3	16,1	43	0
	4	16,9	51	1
4	7	20,0	79	2
	2	16,8	49	0
	3	17,5	55	1
	4	19,4	75	1
	7	22,5	101	2
6	2	18,6	67	1

Approximate calculated dimension and nett mass per 100 metres				Gland to suit
Rated area mm <sup>2</sup>	Number of cores	Max. overall dia. mm	Nett mass kg/100m	
6	3	19,6	77	1
	4	20,9	89	1
	2	20,7	85	1
10	3	21,9	99	2
	4	23,4	117	2
16	2	23,1	108	2
	3	25,9	149	2
	4	27,9	176	3
25	2	22,4	113	2
	3	26,9	173	3
	4	29,1	211	3
35	2	23,9	138	2
	3	28,8	213	3
4	4	32,5	283	4

Approximate calculated dimension and nett mass per 100 metres				Gland to suit
Rated area mm <sup>2</sup>	Number of cores	Max. overall dia. mm	Nett mass kg/100m	
35	3	33,2	295	4
	4	36,5	367	4
50	3	36,5	275	4
	4	40,2	471	4
70	3	41,3	486	4
	4	45,2	610	5
95	3	43,7	567	5
	4	47,9	716	5
120	3	47,4	685	5
	4	53,7	922	6
150	3	53,0	864	6
	4	58,7	1092	6
185	3	59,2	1076	6
	4	66,7	1438	7